

gala

Reference G3783500
Description Thermostatic shower column
Collection ROA



TECHNICAL SPECIFICATIONS


- Flow restrictor to 8 l/min included
- Contributes to obtaining BREEAM, LEED and VERDE certifications through its sustainable use of water
- The alloy used to produce it is included in the "European Positive List" (no migration of hazardous materials to water)
- G-Last chrome technology: high resistance against scratches

Thermostatic faucet



49 cm extensible shower bar

Shower set included:

- Ø 20 cm shower head
- 150 cm flexible hose
- Ø 10 cm hand shower. 1 function
- Hand shower holder

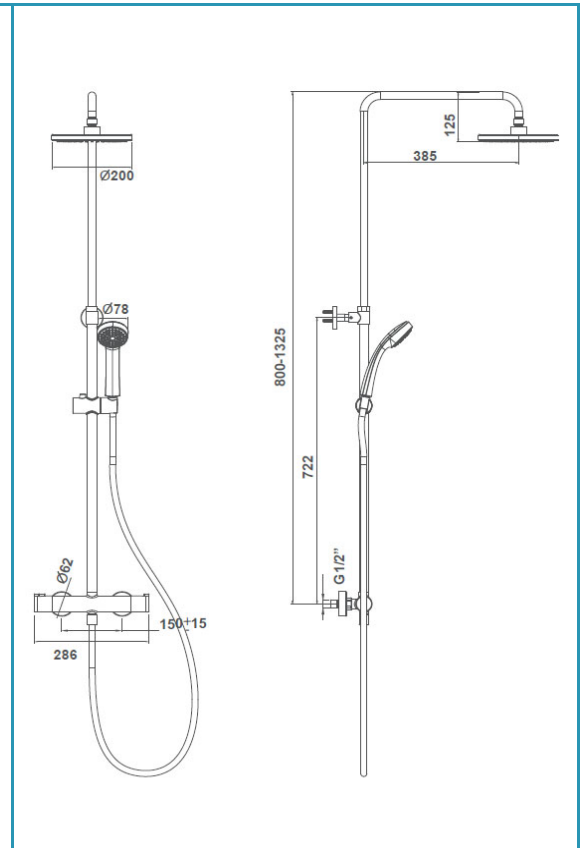

FLOW RATE

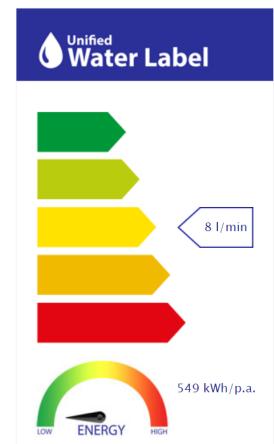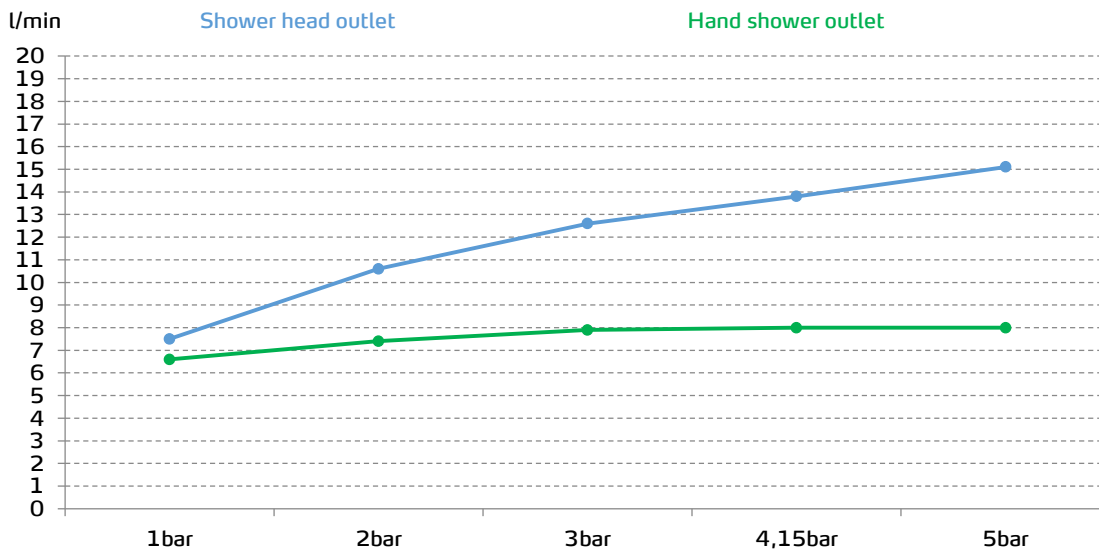

Data measured in maximum flow position with mixed water